

Initialization of **BTN_Button2**

Click **BTN_Button2**


```
Open(WIN_FormAFA, "editm")
TableDisplay(TABLE_AFA)
```

Click **BTN_Button3**

```
IF TableSelect(TABLE_AFA)<>-1 THEN
    HReadSeek(AFA, AFAID, TABLE_AFA.COL_AFAID, hIdentical)
    Open(WIN_FormAFA, "editm")
    TableDisplay(TABLE_AFA)
END
```

Click **BTN_Button4**

```
IF TableSelect(TABLE_AFA)<>-1 THEN
    IF YesNo("Biztosan törölni akarja ezt a rekordot?") THEN
        HReadSeek(AFA, AFAID, TABLE_AFA.COL_AFAID, hIdentical)
        HDelete(AFA)
        TableDisplay(TABLE_AFA)
    END
END
```

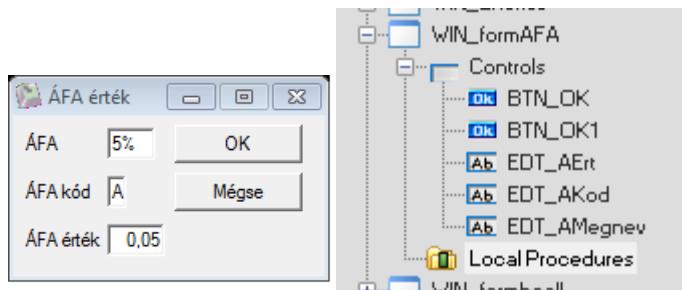

Global Declarations of WIN_formAFA

```

PROCEDURE WIN_formAFA(m)
GLOBAL
  gsMode is string
  gsAfan,gsAfak is string
  
```

Initialization of WIN_formAFA

```

gsMode=m
IF gsMode="editn" THEN
  HReset(AFA)
ELSE
  gsAfak=AFA.AKod
  gsAfan=AFA.AMegnev
END
FileToScreen(WIN_formAFA,AFA)
  
```

Click BTN_OK


```

ScreenToFile(WIN_formAFA)
IF gsAfak<>AFA.AKod THEN
  IF ellenor("AFA","Akod",EDT_AKod) THEN
    ReturnToCapture(EDT_AKod)
  END
END
IF gsAfan<>AFA.AMegnev THEN
  IF ellenor("AFA","AMegnev",EDT_AMegnev) THEN
    ReturnToCapture(EDT_AMegnev)
  END
END
IF gsMode="editn" THEN
  HAdd(AFA)
ELSE
  HModify(AFA)
END
Close()
  
```

Click BTN_OK1

```

Close()
  
```

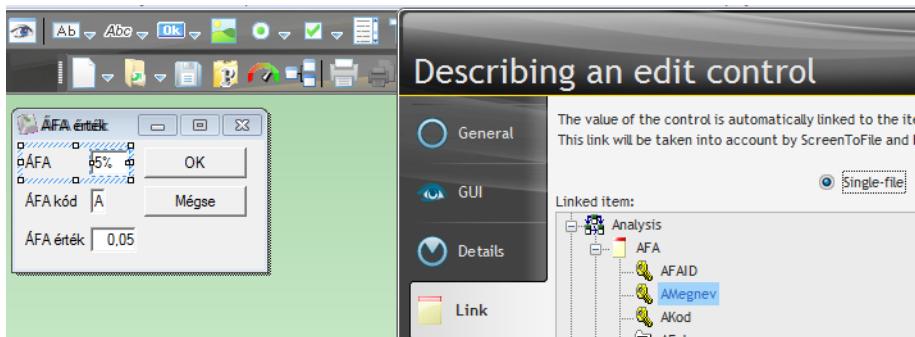

Global Procedure ellenor

```

// Summary: <specify the procedure action>
// Syntax:
// [ <Result> = ] ellenor (<file>, <key>, <value>
// 
// Parameters:
// file: <specify the role of file>
// key: <specify the role of key>
// value: <specify the role of value>
// Return Value:
// boolean: // None
// 
// For instance:
// Indicate an example.
// 
PROCEDURE ellenor(file,key,value)

HSeek(file,key,value,hIdentical)
IF HFound(file) THEN
  Warning(""+value+" " "érték már megtalálható az adatállományban!" )
  RESULT True
ELSE
  RESULT False
END

```

Global Procedure utolsor